



DIGITAL SOUND LEVEL METER MODEL NO.WT85

APPLICATION

The appearance design of digital sound level meter is novel, small and portable. The digital sound level meter is applicable for measurement of noise engineering, quality control, health prevention and various environmental noises, including noise measurement in such various places as factories, offices, transporting routes, families, stereo equipment and other places.

KEY FEATURES

- ✓ This is an easy to use and handy Mini Sound Level Meter. Designed for sound quality control that measures sound level from 30dBa up ~ 130dBa. It has auto range, wide measuring and frequency range (31.5Hz ~ 8KHz), max/min hold, Frequency Weighting A and Wide dynamic range
- ✓ Instantaneous Sound Measure Function
- ✓ Automatic backlight Display
- ✓ Digital Display with Auto Range
- ✓ Uses dBa as unit of measurement
- ✓ 1.5dB high accuracy
- ✓ Max/min/current value Hold function
- ✓ With weighted sound pressure levels A
- ✓ Low battery indication
- ✓ Auto power off design for energy saving
- ✓ Large and clear LCD screen
- ✓ Reliable, accurate and fast way to measure sound level and calculate the decibel of factory, office, traffic, family, audio system, etc.




DIGITAL SOUND LEVEL METER
MODEL NO.WT85

SPECIFICATIONS

- * Measuring Range:30~130dBA
- * Accuracy:±1.5dB
- * Frequency Response:31.5Hz~8KHz
- * Frequency Weighting Features: A Weighting
- * Resolution:0.1dB
- * Power Source:3*1.5V AAA Batteries
- * Working Temperature and Humidity:0~40°C,10~80%RH
- * Storage Temperature and Humidity:-10~60°C,0~90%RH
- * Weight:96.38g(Excluding Battery)
- * Unit Dimension:56.1*36.03*117mm

ACCESSORIES

- * Sponge Ball/Windscreen x 1pc
- * 1.5V AAA battery x 3pcs
- * Instruction manual x 1pc
- * Standard box packing

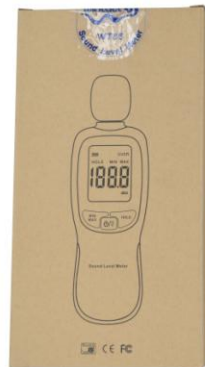

BESTONE INDUSTRIAL LTD.

Tel: +86 755 82952326, Fax: +86 755 82952326

Web: www.bestone-meter.com

Email: liu@bestone-meter.com

Skype: Bestone-Shirley Liu

WhatsApp: +86 18929394326